


MPB 系列
SERIES

标准品
Standard

- 最适合逆变器高频、大电流电路。
For applications where high frequency and high current are required. (TV, display monitor, power supply, lighting Inverter, etc)
- 外包装使用难燃性 (UL94 V-0) 环氧树脂, 有优良的安全性。
Coated with flame-retardant (UL94 V-0) epoxy resin.

RoHS compliance

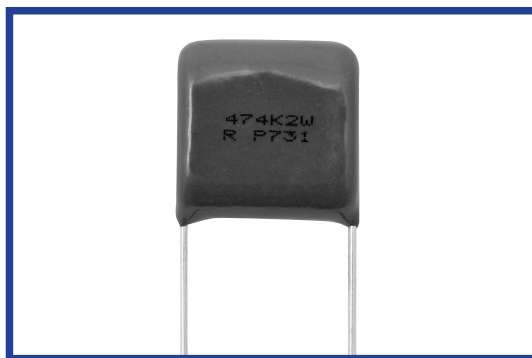


规格 / SPECIFICATIONS

| | |
|--|---|
| 工作温度范围 / Category Temperature Range | -40~+105°C |
| 额定电压 / Rated Voltage (U _R) | 250Vdc, 450Vdc, 630Vdc |
| 静电容量允许差 / Capacitance Tolerance | ±3%(H), ±5%(J), ±10%(K) |
| 损失角正切值 / tanδ | 0.001max at 1kHz |
| 耐电压 / Voltage Proof | U _R ×150% 60s |
| 绝缘电阻 / Insulation Resistance | C ≤ 0.33μF: 25000MΩmin C > 0.33μF: 7500ΩFmin |
| 标准规格 / Reference Standard | JIS C 5101-16, JIS C 5101-1 |

尺寸图 / DIMENSIONS

(mm)

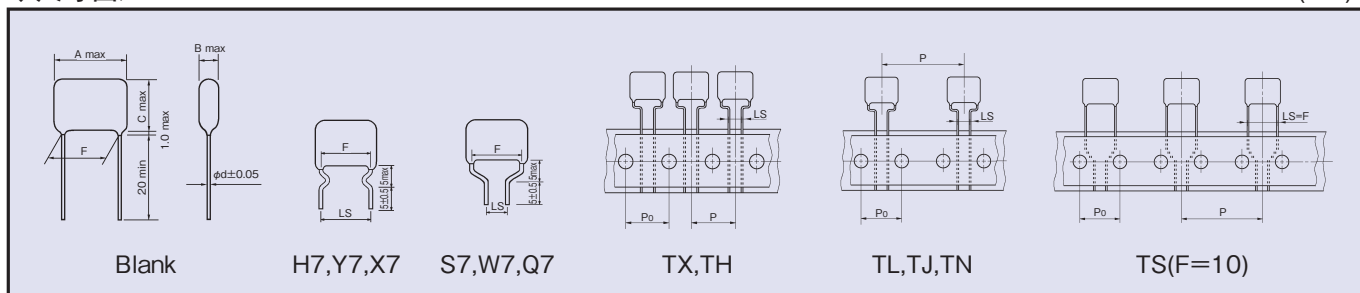

产品型号体系 / PART NUMBER



对应频率的允许电流 / PERMISSIBLE CURRENT FOR FREQUENCY

